

Un-rigging the Ranger 24

1. Attach Jib Halyard to **Bow Pulpit** 2. Flake and bag Jib. 3. Stow jibs in ledge above V-Birth with Jibs to port and Spinnakers to starboard. Spare Main and Storm Jib Forward. Labels facing out. 4. Attach Backstay Pendent and Main Halyard to boom End 5. Flake, Tie and Cover Main

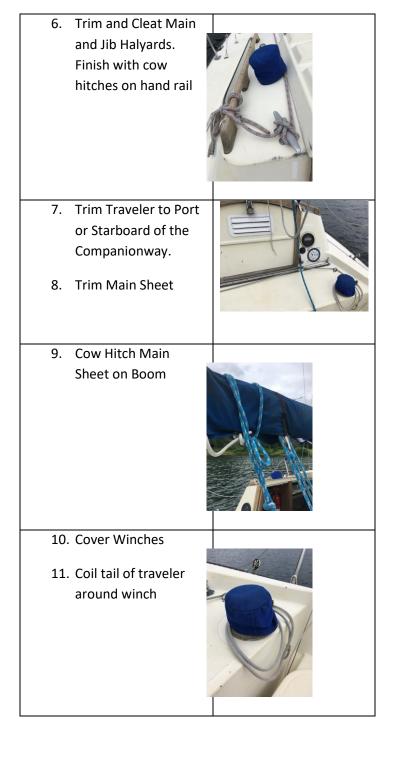

Un-rigging the Ranger 24

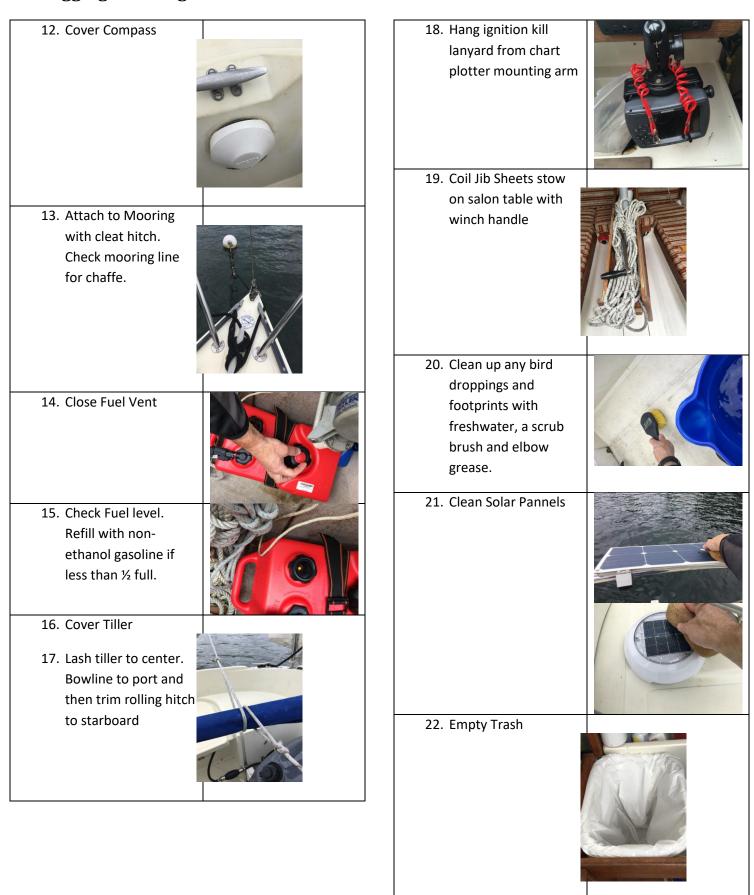

Un-rigging the Ranger 24



